

PRIMJERI GRADNJE OBLICI POVRŠINA



polirano




četkano



bakar



RAL lakirano

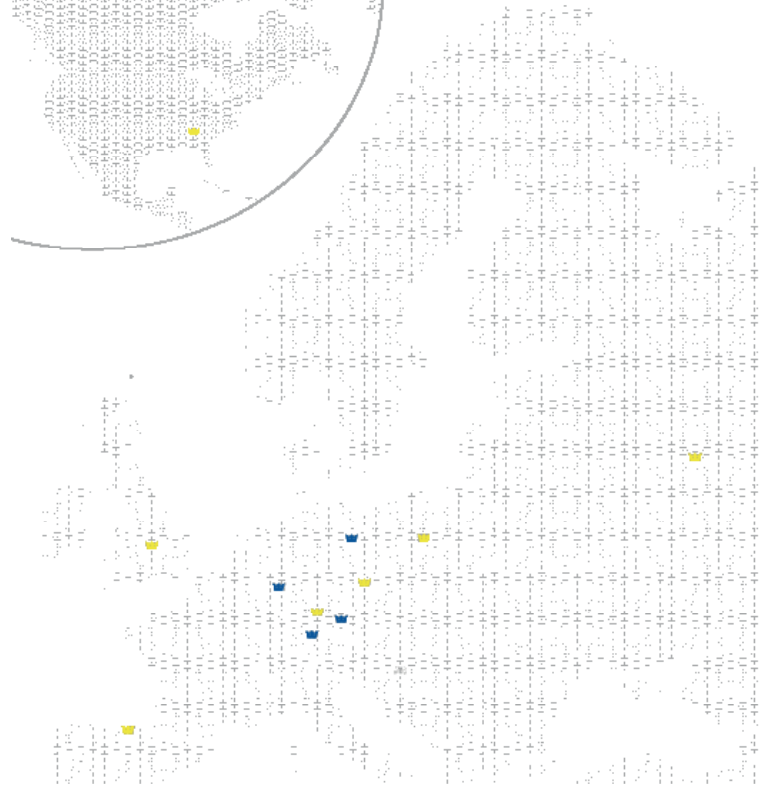

Proizvodna mjesta Skladišta

Jeremias
SISTEMI DIMNJAKA



EW - PP - FLEX
JEDNOSTIJNI SISTEM
DIMOVODA

www.jeremias.hr

CERTIFIKATI



Njemačka

Jeremias GmbH
Opfenrieder Str. 11-14
91717 Wassertrüdingen
phone: +49 (0) 9832 6868-50
e-mail: info@jeremias.de
www.jeremias.de

Poljska

Jeremias Sp. z o.o.
ul. Kokoszki 6
62200 Gniezno
phone: +48 61 428 46 20
e-mail: info@jeremias.pl
www.jeremias.pl

Španjolska


Jeremias España S. A.
P.I. Zubieta 3
48340 Amorebieta / Bizkaia
phone: +34 946301010
e-mail: info@jeremias.com.es
www.jeremias.com.es

Hrvatska

Jeremias d.o.o.
Zagrebačka ulica 221
10370 Dugo Selo
phone: +385 1 2754 713
e-mail: info@jeremias.hr
www.jeremias.hr

Jeremias
SISTEMI DIMNJAKA

neobvezujuće ponude i
obrasce za narudžbe dobit ćete:



www.jeremias.hr



garancija
5
godina

NAMJENA / PRIMJENA

Jednostijeni, fleksibilni i tlačno nepropusni sistem dimovoda od plastike

GORIVO

Ulje i plin

RADNA TEMPERATURA

≤ 120°C

MATERIJAL

PP - polipropilen

DEBLJINA STIJENKE

1,0 mm (pri Ø 80 mm)
1,2 mm (pri Ø 100 mm)

SPOJ

Utični spoj spojnica/žlijeb sa unutarnjom EPDM-brtvom

DOZVOLJENO ZA NADTLAK

5000 Pa. < DN 200
200 Pa. ≥ DN 200

OTPORNOST NA GORENJE ČAĐE

Ne

SREDNJA HRPAVOST

3,0 mm

PROMJERI

Na skladištu: Ø60, Ø80, Ø100, Ø125
Po narudžbi: Ø160

CE-BROJ CERTIFIKATA

0036 CPR 9174 043


CE-KLASIFIKACIJA PREMA EN 14471

EW-PP-FLEX DN 60 - ≤ 110
T120 - H1 - W2 - 000 - LI - E - UO

EW-PP-FLEX DN > 110 - DN 160
T120 - P1 - W2 - 000 - LI - E - UO

EW - PP FLEX

Ovim letkom Vam u najkraćim crtama predstavljamo prednosti našeg sistema **EW-PP-FLEX**.

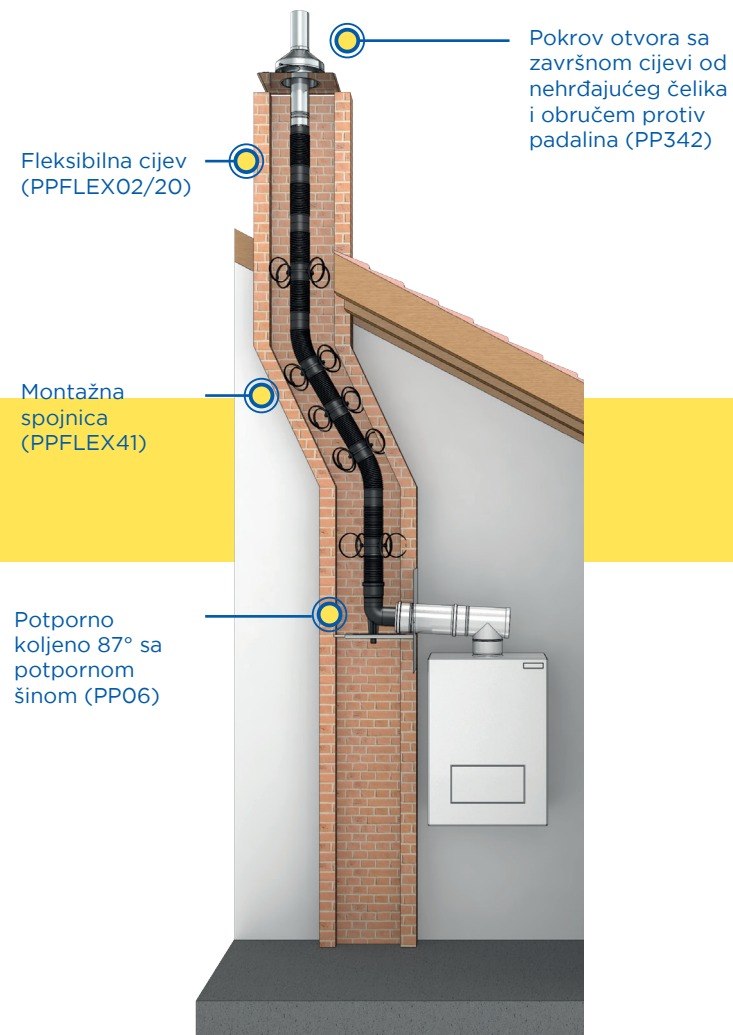PRIMJER MONTAŽE**PRIMJENA**

Sisitem dimovoda EW - PP - Flex može se koristiti za odvod ispušnih plinova svih uređaja na ulje, odnosno plin u režimu rada podtlaka ili nadtlaka sa maksimalnom temperaturom ispušnih plinova od 120 °C

Dimenzijom prilagođenim priključcima kotla sistem EW-PP-FLEX se može spojiti na sve uobičajene vrste kotlova.

UGRADNJA

Ugradnju treba vršiti stručno u skladu sa Uputama za montažu, kao i važećim nacionalnim propisima.



PPFLEX40



PPFLEX30



PPFLEX07



PP06

Kod pitanja ili želja Vam naš tim uvijek stoji na raspolaganju! Nazovite nas ili se informirajte na www.jeremias.hr.